


FLAT WIRES FOR HI-FI R/N - POLARISED

CONSTRUCTION FEATURES

Conductor	Red copper flexible formation class 5
Insulation	PVC quality TI2
Colours	Red/Black - Cristal

ELECTRICAL CHARACTERISTICS

Test voltage	1500 V
Minimum insulation resistance	200 M Ω /km
Product sections	0,35 - 0,50 - 0,75 1 - 1,5 - 2,5 mm

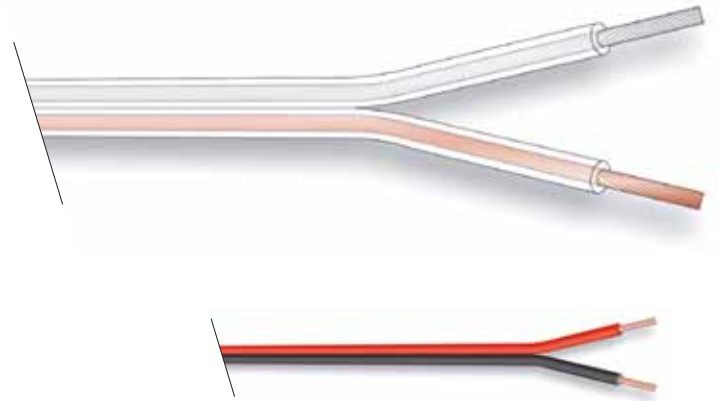

Standard packaging
of 100 mt. in TRB