

FLEXIBLE INTERCOM CABLES - CEF/NA


CONSTRUCTION FEATURES

Internal Conductor	Red copper flexible formation class 5
Conductor Section	0,50 mmq (On request 0,35 - 0,75)
Insulation	Mix PVC quality R2
Sheath	PVC quality RZ colour grey

For core colours see the table DIN 47100 on page 40.

ELECTRICAL CHARACTERISTICS

Electrical resistance of conductor to 20° C	0,35 mmq: 60 Ohm/Km 0,50 mmq: 39 Ohm/Km 0,75 mmq: 26 Ohm/Km
Minimum insulation resistance	200 MΩ/km
Voltage	1500 V

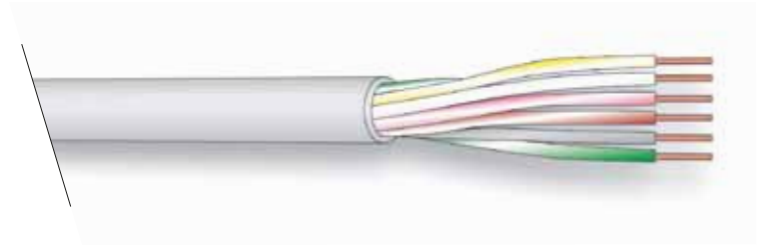

Standard packaging
of 100 mt. in TRB
Reference standards
CEI 20-22 - IEC 332-1

for details on the formation
consult table on page 46