


RG 59 B/U

CONSTRUCTION FEATURES

Internal conductor	0,58 mm CU
Dielectric	PE
Dimensions Dielectric	Ø 3,70 mm
Braided Screen	CU 95%
External sheath	PVC mix colour black
Ø Finished Cable	6,20 mm

CARATTERISTICHE ELETTRICHE

Characteristic impedance	$75 \pm 3 \text{ Ohm}$
Mutual capacity	67 pf/mt
Relative velocity of propagation	66%

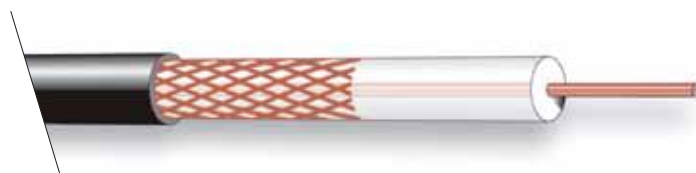

Attenuation d/b 100 mt.

50 Mhz	7,30
100 Mhz	10,20
200 Mhz	15,40
400 Mhz	22,00
800 Mhz	33,70
1050 Mhz	40,00

Standard packaging
of 100 mt. in TRB
spools of 500 mt. and 1000 mt.